

# 25 WATT AC-DC CONVERTER

## MRA-SA SERIES

### General Description


MR-Series has been developed as an alternative for WR/ER Series. This open frame switcher has excellent EMI-performance. It is safety approved, compact, and very cost effective.

### Features

1. Small size
2. High efficiency
3. Connectors: screw type (standard), molex optional

### Options

1. Case cover (Add suffix "-P" ex. MRM05SA-PU)
2. Connector type (Add suffix "-S")

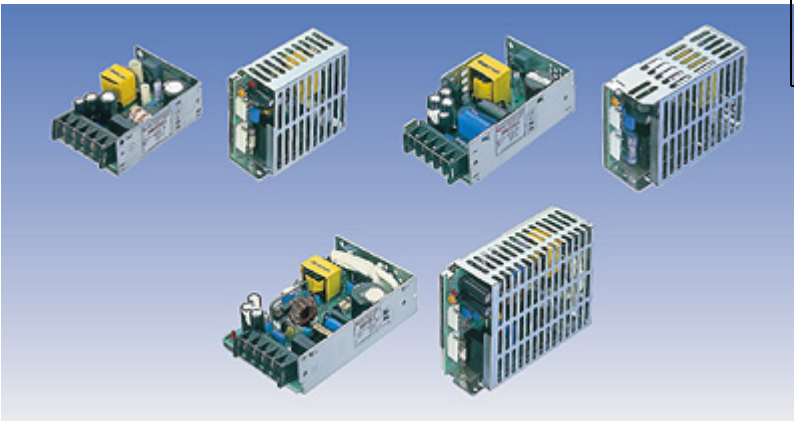

Specifications<AC/DC>	Model				
<b>MRA**SA 25WATTS/SINGLE</b>	MRA05SA-U	MRA12SA-U	MRA15SA-U	MRA24SA-U	MRA48SA-U
<b>Input Characteristic</b>					
Input Voltage	AC115V				
Input Current	1.2A				
Input Range	AC85-132V(DC110-175V)				
Input Frequency	50/60Hz				
Input Frequency Range	47-440Hz				
Phase	Single				
Inrush Current *1	20A(maximum)at AC115V				
Efficiency [%] (typical) *2	74	78	81	82	83

### MRA\*\*SA Specification

Specifications<AC/DC>	Model				
MRA**SA 25WATTS/SINGLE	MRA05SA-U	MRA12SA-U	MRA15SA-U	MRA24SA-U	MRA48SA-U
<b>Output Characteristic</b>					
Output Voltage [V]	5	12	15	24	48
Output Current [A]	5.0	2.1	1.7	1.1	0.55
Voltage Adjust Range	+/- 10% of Rated Output Voltage(at no load within the input range)				
Ripple and Noise [mVp-p](maximum) *3	150	220	250	340	580
<b>Regulation</b>					
a.Statistic Line Regulation [mV](maximum)	40	96	120	192	384
b.Statistic Load Regulation [mV](maximum)	50	120	150	240	480
c.Temperature Coefficient *4	0.03%/°C				
d.Drift[mV](maximum) *5	40	75	90	135	255
e.Dynamic Load Regulation [mV](typical) *6	150	360	450	720	1440
f.Recovery Time *6	0.3mS(Typical)				
Rise up time	500mS(maximum) at 25°Cand rated input/output				
Hold up time	20mS(minimum) at 25°Cand rated input/output				
<b>Functions</b>					
Overcurrent Protection $\geq 10\%$ of Rated Output Current[A]	Current Limiting with automatic recovery				
	5.25	2.21	1.79	1.16	0.58
Overvoltage Protection $\geq 10\%$ of Rated Output Voltage[V]	output shutdown(to reset,leave 60seconds after shut-off)				
	5.50	13.2	16.5	26.4	52.8
Remote Sense	not available				
Remote On/Off	not available				
<b>Environmental</b>					
Operating Temperature *7	-5 to +50°Cenclosed type: -5 to +40°C				
Operating Humidity	30 to 85%RH(non-condensing)				
Storage Temperature	-20 to +85°C				
Storage Humidity	10 to 85%RH(non-condensing)				
Withstanding Voltage	Primary-Secondary AC2,000V for 1minute				
	Primary-Frame Ground AC1,500V for 1minute				
	Secondary-Frame Ground AC500V for 1minute				
Isolation Resistance	Primary-Secondary-Frame Ground 50M $\Omega$ (minimum) by DC500V insulation tester				
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s <sup>2</sup> ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)				
Shock	294m/s <sup>2</sup>				
Cooling	Convection				
? Leakage Current	1mA(maximum) at 25°Crated input/output and rated input frequency				
? Conducted line noise	Built to meet FCC Part15-B Class B				
? Safety	Built to meet VCCI Class B				
	UL:UL1950				
	C-UL:CSA C22.2 No.234(Level 3)				
Weight (typical)	220g/enclosed type:250g				
? MTBF [H]	640,000				
? Switching Frequency[kHz](typical) *8	40	40	45	45	45

Conditions:

\*1 at cold start

\*2 at DC130V input and rated output

\*3 measured by a bayonet probe at the end of a pair of 20cm long wires terminated with a 47 $\mu$ F electrolytic capacitor and a 0.1 $\mu$ F film capacitor in parallel at a 0 to 100MHz bandwidth

\*4 at -5 to +50°Cenclosed type: at -5 to +40°C


\*5 for 7hour period after 1hour warm-up at 25°Cand rated input/output

\*6 when output current changed from 25% to 75% of rated output current rapidly at AC100V input


\*7 safety approved at 40°C

\*8 variable on input voltage and load conditions


### Block Diagram

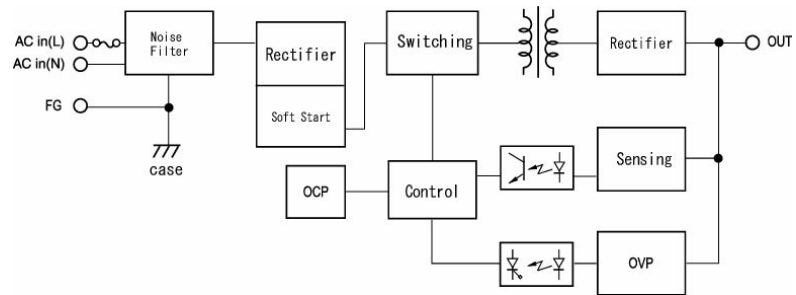


### Efficiency Curve

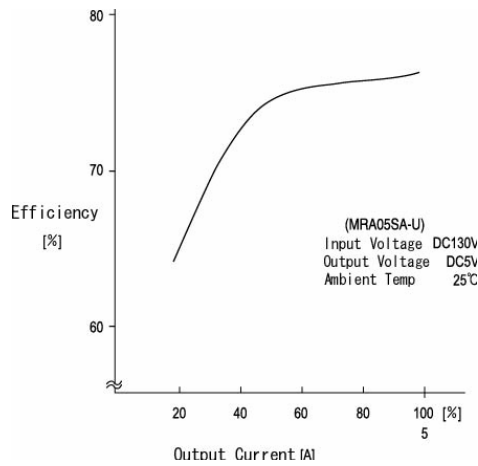

**OCP Curve**

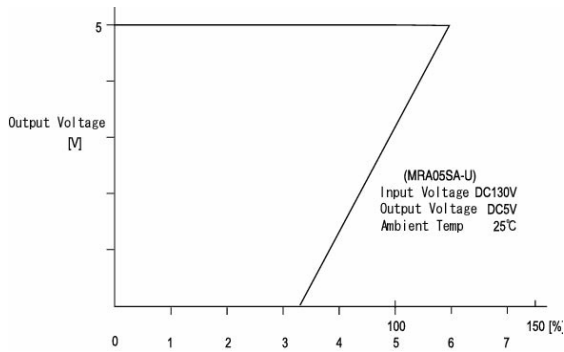

**Derating Curve**

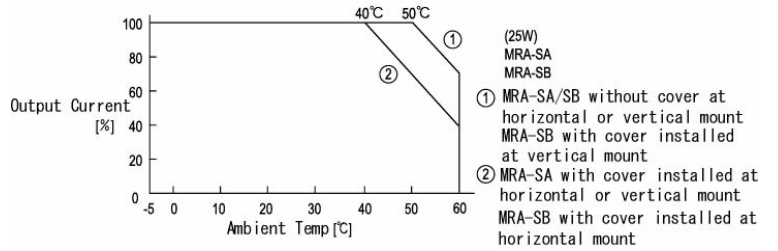

**Dimension (mm)**

