




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

DC/DC SWITCHING POWER SUPPLY
DUAL CHANNEL OUTPUT
1.5 WATTS

OCH1.5D SERIES

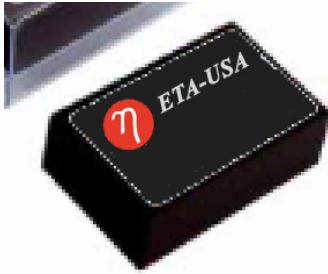

General Description

Features

1. Power module for PCB mountable
2. Fully Encapsulated Plastic Case
3. Regulated Output
4. Low ripple and Noise

Options

Application

Broad needs

Input

Input Voltage Range:	DC4.5~5.5V OCH1.5D5-XX
	DC10.8~13.2V OCH1.5D12-XX
	DC21.6~26.4V OCH1.5D24-XX
	DC43.2~52.8V OCH1.5D48-XX

Switching frequency: 20kHz (typ.)



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Output Characteristic	Unit	Models					
		OCH1.5D5-5		OCH1.5D5-12		OCH1.5D5-15	
Output Voltage	Vdc	+5	-5	+12	-12	+15	-15
Output Current	mA	+150	-150	+60	-60	+50	-50
Ripple	mVpp	< 0.2% Vout + 10mV					
Noise(max)	mVpp	< 0.5% Vout + 30mV					
Voltage Accuracy	V	±3%					
Regulation							
a. Line Regulation [max]	mV	± 0.3%					
b. Load Regulation	mV	± 0.5%					
c. Temperature Coefficient	/°C	± 0.02%					

Efficiency	*1	%	57	59	61
-------------------	-----------	----------	-----------	-----------	-----------

Output Characteristic	Unit	Models					
		OCH1.5S12-5		OCH1.5S12-12		OCH1.5S12-15	
Output Voltage	Vdc	+5	-5	+12	-12	+15	-15
Output Current	mA	+150	-150	+60	-60	+50	-50
Ripple	mVpp	< 0.2% Vout + 10mV					
Noise(max)	mVpp	< 0.5% Vout + 30mV					
Voltage Accuracy	V	±3%					
Regulation							
a. Line Regulation [max]	mV	± 0.3%					
b. Load Regulation	mV	± 0.5%					
c. Temperature Coefficient	/°C	± 0.02%					

Efficiency	*1	%	60	61	65
-------------------	-----------	----------	-----------	-----------	-----------





ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Output Characteristic	Unit	Models					
		OCH1.5D24-5		OCH1.5D24-12		OCH1.5D24-15	
Output Voltage	Vdc	+5	-5	+12	-12	+15	-15
Output Current	mA	+150	-150	+60	-60	+50	-50
Ripple	mVpp	< 0.2% Vout + 10mV					
Noise(max)	mVpp	< 0.5% Vout + 30mV					
Voltage Accuracy	V	±3%					
Regulation							
a. Line Regulation [max]	mV	± 0.3%					
b. Load Regulation	mV	± 0.5%					
c. Temperature Coefficient	/°C	± 0.02%					

Efficiency	*1	%	54	54	56
-------------------	-----------	----------	-----------	-----------	-----------

Output Characteristic	Unit	Models					
		OCH1.5D48-5		OCH1.5D48-12		OCH1.5D48-15	
Output Voltage	Vdc	+5	-5	+12	-12	+15	-15
Output Current	mA	+150	-150	+60	-60	+50	-50
Ripple	mVpp	< 0.2% Vout + 10mV					
Noise(max)	mVpp	< 0.5% Vout + 30mV					
Voltage Accuracy	V	±3%					
Regulation							
a. Line Regulation [max]		± 0.3%					
b. Load Regulation		± 0.5%					
c. Temperature Coefficient	/°C	± 0.02%					

Efficiency	*1	%	52	54	54
-------------------	-----------	----------	-----------	-----------	-----------

Conditions:

*1 Rated input and Rated output

*2 at Output current quick change 25% to 75%

*3 At 100% load (convection cooling)






ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Environmental Specification	
Operating Temperature*3	-25 to +70 °C (at full load)
Storage Temperature	-55 to +105 °C
Storage Humidity	95% RH [non-condensing] max
Isolation Resistance	Primary-Secondary-Frame Ground 100MΩ (minimum) by DC500V insulation tester
Cooling	Convection
MTBF	>1,000,000 hours at 25°C
Function/Protection	
Short circuit Protection	Current limit, auto-recovery
Over Power Protection	Works at over 120% and auto-recovery
Mechanical	
Dimension [mm]	31.8W × 20.3L × 10.2H ±0.5
Weight [g] (typical)	13

Derating Curves

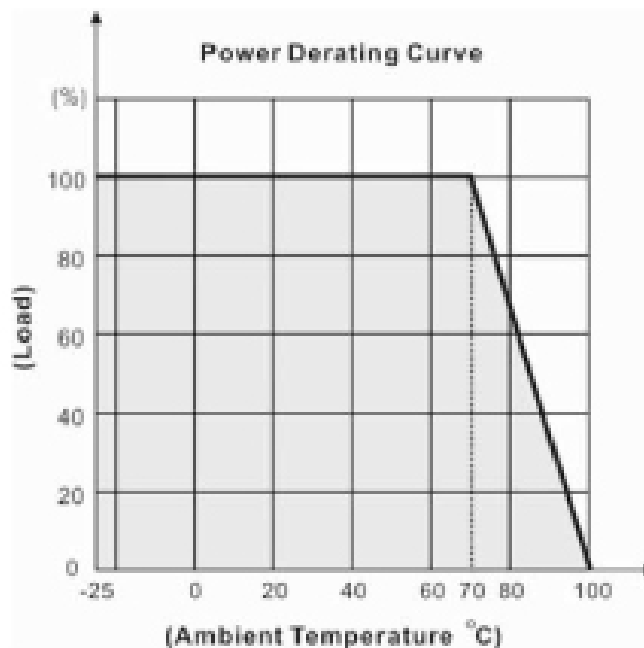




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Mechanical drawings

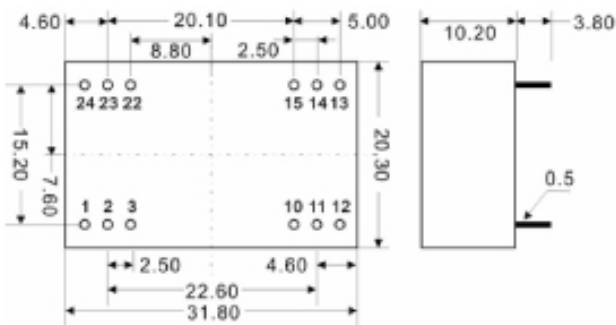

PIN#	Single	Dual
1	+VIN	+VIN
2	NC	-VOUT
3	NO PIN	COMMON
10	-VOUT	COMMON
11	+VOUT	+VOUT
12	-VIN	-VIN
13	-VIN	-VIN
14	+VOUT	+VOUT
15	-VOUT	COMMON
22	NO PIN	COMMON
23	NC	-VOUT
24	+VIN	+VIN

Block Diagram

