

70 WATT AC-DC CONVERTER VTL-00B SERIES



Features
Compact
Isolated outputs
High Performance and Reliability
Excellent for equipment/din rail applications

General Description
VT is the basic series of switching power supplies manufactured by ETA Electric Industry. 188 different models are available. Output power ranges from 10W to 600W. 50 models have dual outputs; 33 models are designed with triple outputs. Input selectable ("SZ") models conform to local power conditions.

Specifications<AC/DC>	Model			
VTL**B 70WATTS /3 OUTPUTS	VTL01B	VTL01B-B	VTL03B	VTL04B
Input Characteristic				
Input Voltage	AC200V(DC260V)			
Input Range	AC180-264V(DC220-350V)			
Input Frequency	50/60Hz			
Input Frequency Range	47 -440Hz			
Phase	Single			
Inrush Current *1	25A(maximum) at rated input/output			
Efficiency [%] (typical) *2	77	80	77	77

VTL**00B Specification												
Specifications<AC/DC>	Model											
VTL**B 70WATTS /3 OUTPUTS	VTL01B			VTL01B-B			VTL03B			VTL04B		
Output Characteristic												
Output Voltage [V]	5	+12	-12	+12	+5	-12	5	+12	-5	5	+15	-15
Output Current [A]												
at vertical mount	8.0	1.8	0.7	4.0	3.0	0.8	8.0	2.0	0.8	8.0	1.4	0.8
at horizontal mount	6.0	1.3	0.5	3.0	2.2	0.6	6.0	1.5	0.6	6.0	1.0	0.6
peak current at vertical mount	-	-	-	5.2	-	-	-	-	-	-	-	-
peak current at horizontal mount	-	-	-	3.9	-	-	-	-	-	-	-	-
Voltage Adjust Range	V1:+5% of Rated Output Voltage(at no load within input range) V2,V3:fixed with tolerance of +/-3.5% Rate Output Voltage(at no load within input range)											
Ripple and Noise [mVp-p](maximum) *3	100	170	170	170	100	170	100	170	100	100	200	200
Regulation												
a.Statistic Line Regulation [mV](maximum)	35	84	84	84	35	84	35	84	35	35	105	105
b.Statistic Load Regulation [mV](maximum)	50	120	120	120	50	120	50	120	50	50	150	150
c.Temperature Coefficient *4	0.03%/°C											
d.Drift[mV](maximum) *5	40	75	75	75	40	75	40	75	40	40	90	90
e.Dynamic Load Regulation [mV](typical) *6	150	360	360	360	150	360	150	360	150	150	450	450
f.Recovery Time *6	0.5mS(typical)											
Rise up time	200mS(maximum) at 25°C and rated input/output											
Hold up time	20mS(minimum) at 25°C and rated input/output											
Functions												
Overcurrent Protection	Current Limiting with automatic recovery											
Overvoltage Protection	V1:SCR-Clamper V2 V3:Zener diode clamping											
Remote Sense	not available											
Remote On/Off	not available											
Environmental												
Operating Temperature	0 to +50°C											
Operating Humidity	85%RH(non-condensing)											
Storage Temperature	-20 to +85°C											
Storage Humidity	30 to 85%RH(non-condensing)											
Withstanding Voltage	Primary-Secondary AC2,500V for 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC500V for 1minute											
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester											
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s ² ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)											
Shock	294m/s ²											
Cooling	Convection											
? Leakage Current	1.0mA(maximum)											
? Line Conduction Noise	Not specified											
? Safety	-											
? Weight (typical)	470g											
? MTBF [H]	390,000											
? Switching Frequency[kHz](typical)	42											

Conditions:

*1 at cold start

*2 at DC260V and rated output

*3 measured by a bayonet probe at the output connector at a 0 to 100MHz bandwidth

*4 at 0 to +50°C

*5 for 7hour period after 1hour warm-up at 25°C and rated input/output

*6 when output current changed from 25% to 75% of rated output current rapidly at AC100V input




ETA-USA


HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com


OCP Curve

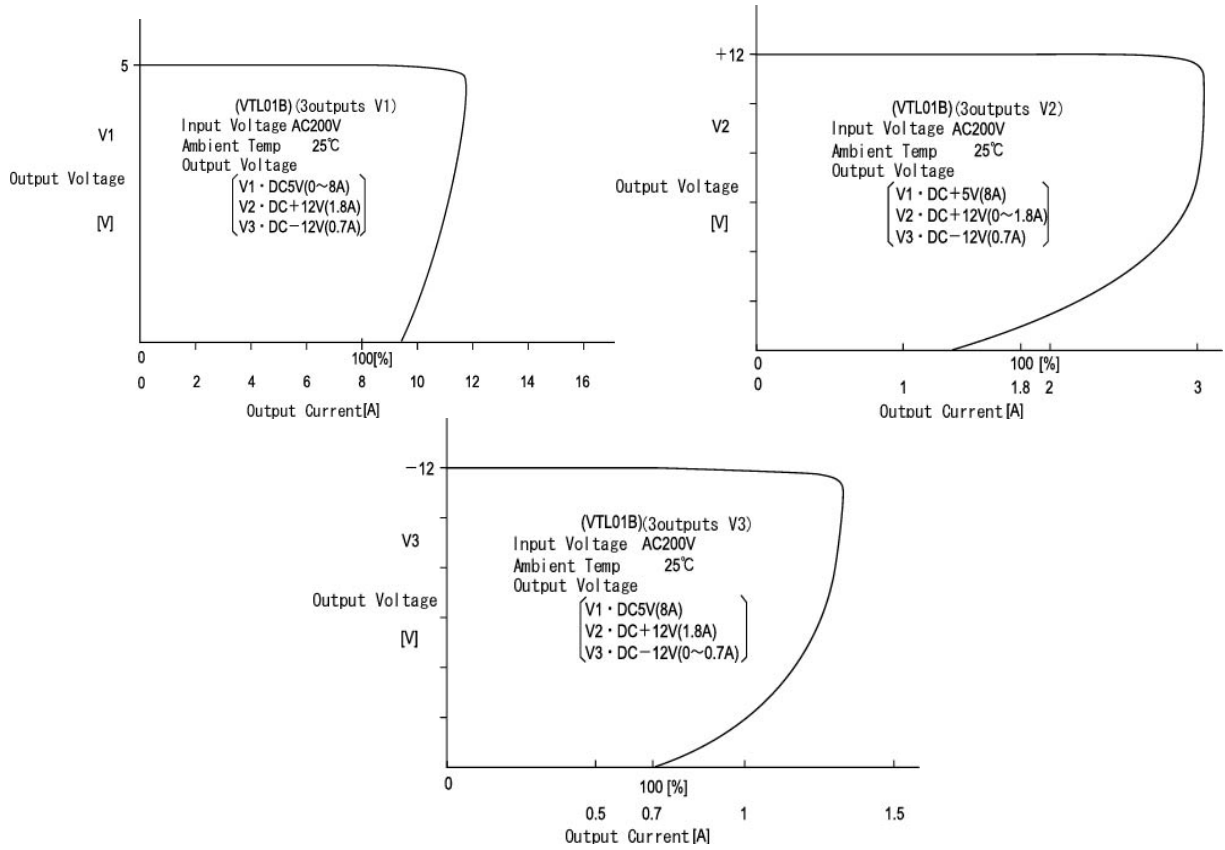

Efficiency Curve

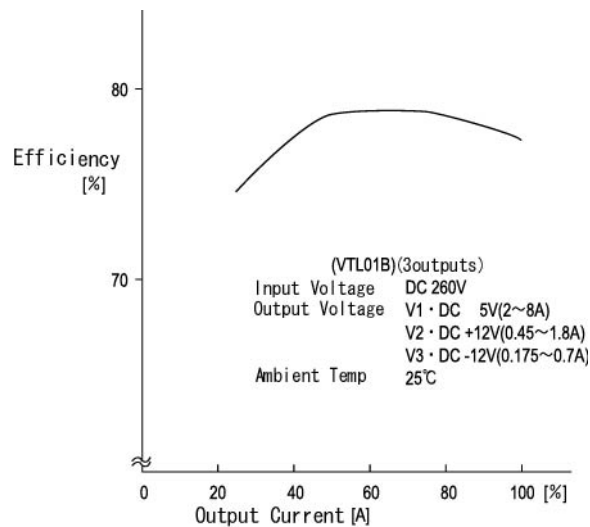

Dimension Diagram(mm)

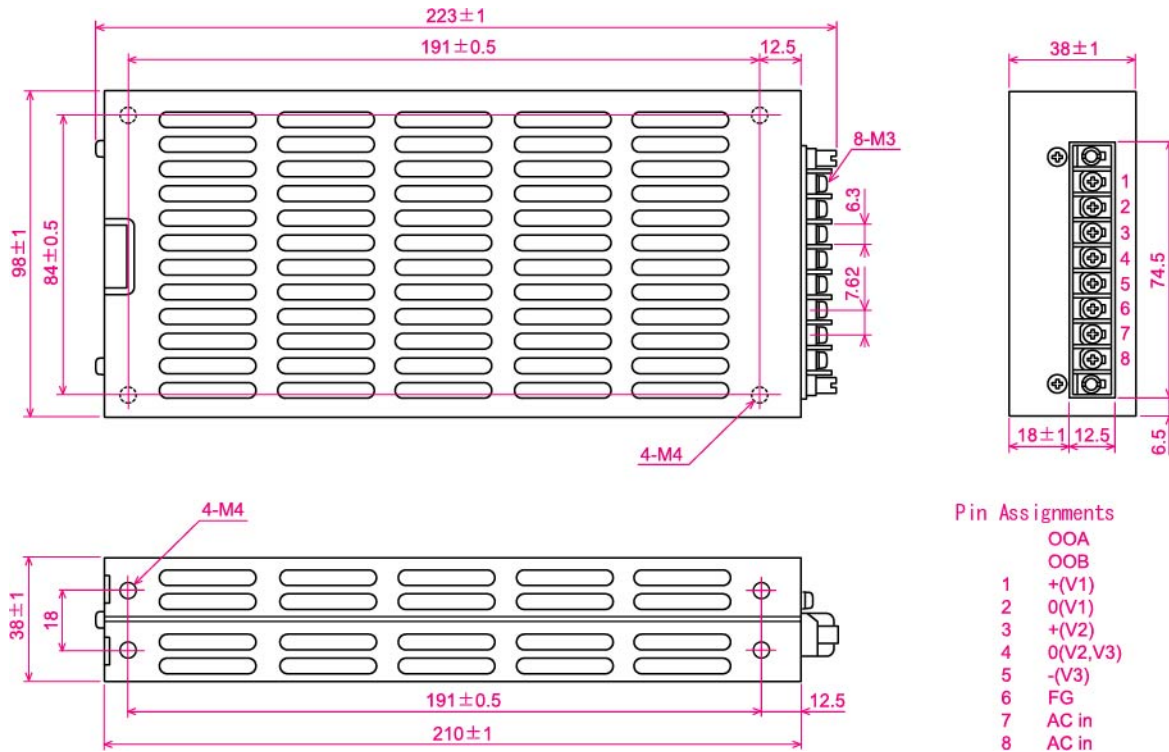

Pin Assignments

- OOA
- OOB
- 1 +(V1)
- 2 0(V1)
- 3 +(V2)
- 4 0(V2,V3)
- 5 -(V3)
- 6 FG
- 7 AC in
- 8 AC in