

**VTM-00B SERIES**




**General Description**

VT is the basic series of switching power supplies manufactured by ETA Electric Industry Co., Ltd. 188 different models are available. Output power ranges from 10W to 600W. 50 models have dual outputs; 33 models are designed with triple outputs. Input selectable ("SZ" models) conform to local power conditions.

Features	Options
<ol style="list-style-type: none"> <li>1. High reliability</li> <li>2. High efficiency</li> <li>3. Inrush current protection built-in</li> </ol>	<ol style="list-style-type: none"> <li>1. Terminal Cover (ordered separately)</li> </ol>

Specifications<AC/DC>	Model		
VTM**B 12.5WATTS /3 OUTPUTS	VTM01B	VTM03B	VTM04B
<b>Input Characteristic</b>			
Input Voltage	AC200V		
Input Range	AC180-264V		
Input Frequency	50/60Hz		
Input Frequency Range	47 -440Hz		
Phase	Single		
Inrush Current *1	30A(maximum) at rated input/output		
Efficiency [%] (typical) *2	62		

**Block Diagram**

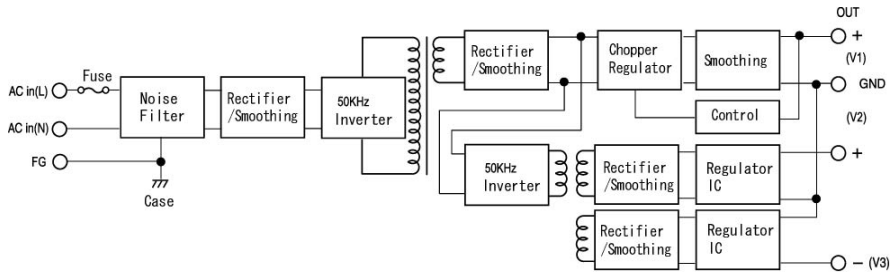

<b>VTM**B Specification</b>									
<b>Specifications&lt;AC/DC&gt;</b>	<b>Model</b>								
<b>VTM**B 12.5WATTS /3 OUTPUTS</b>	<b>VTM01B</b>			<b>VTM03B</b>			<b>VTM04B</b>		
<b>Output Characteristic</b>									
Output Voltage [V]	+5	+12	-12	+5	+12	-5	+5	+15	-15
Output Current [A]	1.8	0.15	0.15	1.8	0.15	0.15	1.8	0.12	0.12
Voltage Adjust Range	V1: +/-3% of Rated Output Voltage(at no load within input range) V2,V3: +/-3.5% Rate Output Voltage(at no load within input range)								
Ripple and Noise [mVp-p](maximum) *3	100	25	25	100	25	25	100	25	25
Regulation									
a.Statistic Line Regulation [mV](maximum)	20	6	6	20	6	2.5	20	25	7.5
b.Statistic Load Regulation [mV](maximum)	40	60	60	40	60	25	40	75	75
c.Temperature Coefficient *4	0.02%/°C								
d.Drift[mV](maximum) *5	40	75	75	40	75	40	40	90	90
e.Dynamic Load Regulation [mV](typical) *6	Not specified								
f.Recovery Time *6	Not specified								
Rise up time	200mS(maximum) at 25°C and rated input/output								
Hold up time	10mS(minimum) at 25°C and rated input/output								
<b>Functions</b>									
Overcurrent Protection	only V1:Current Limiting with automatic recovery								
Overvoltage Protection	not available								
Remote Sense	not available								
Remote On/Off	not available								
<b>Environmental</b>									
Operating Temperature	0 to +50°C								
Operating Humidity	85%RH(non-condensing)								
Storage Temperature	-20 to +85°C								
Storage Humidity	30 to 85%RH(non-condensing)								
Withstanding Voltage	Primary-Secondary AC2,500Vfor 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC500V for 1minute								
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester								
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s <sup>2</sup> ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)								
Shock	294m/s <sup>2</sup>								
Cooling	Convection								
? Leakage Current	0.25mA(maximum)								
? Line Conduction Noise	Not specified								
? Safety	-								
? Weight (typical)	250g								
? MTBF [H]	680,000								
? Switching Frequency[kHz](typical)	42								

Conditions:

\*1 at cold start

\*2 at DC260V and rated output

\*3 measured by a bayonet probe at the output connector at a 0 to 100MHz bandwidth

\*4 at 0 to +50°C

\*5 for 7hour period after 1hour warm-up at 25°C and rated input/output

\*6 when output current changed from 25% to 75% of rated output current rapidly at AC100V input


**ETA-USA**

HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com