


# 300 WATT AC-DC CONVERTER


## VTF-SZ SERIES

Specifications<AC/DC>	Model					
VTF**SZ 300WATTS/SINGLE OUTPUT	VTF02SZ	VTF05SZ	VTF12SZ	VTF15SZ	VTF24SZ	VTF48SZ
<b>Input Characteristic</b>						
Input Voltage	AC100V/200V					
Input Range	AC90-132V/180-264V					
Input Frequency	50/60Hz					
Input Frequency Range	47 -440Hz					
Phase	Single					
Inrush Current *1	20A(maximum) at AC100V/40A(maximum) at AC200V					
Efficiency [%] (typical) *2	65	78	81	82	84	85

**Efficiency Curve**

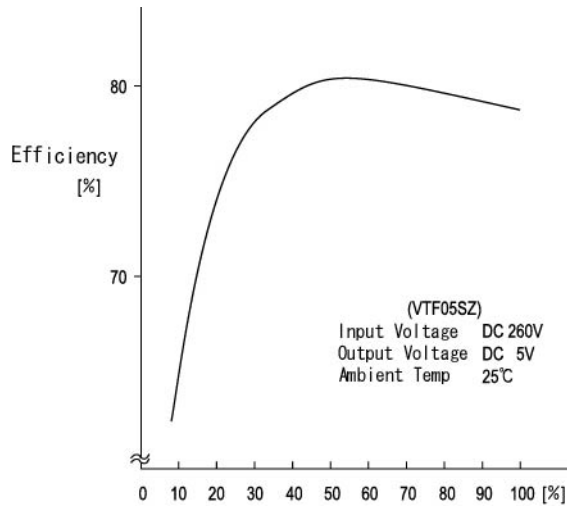

**OCP Curve**

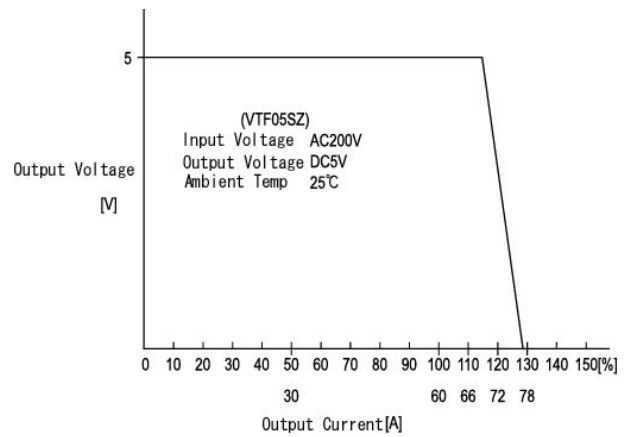

## VTF\*\*SZ Specification

Specifications<AC/DC>	Model					
VTF**SZ 300WATTS/SINGLE OUTPUT	VTF02SZ	VTF05SZ	VTF12SZ	VTF15SZ	VTF24SZ	VTF48SZ
<b>Output Characteristic</b>						
Output Voltage [V]	2	5	12	15	24	48
Output Current [A]	60.0	60.0	30.0	24.0	15.0	7.5
Voltage Adjust Range	+/-10% of Rated Output Voltage(at no load within input range)					
Ripple and Noise [mVp-p](maximum) *3	70	100	170	200	290	530
<b>Regulation</b>						
a.Statistic Line Regulation [mV](maximum)	16	40	96	120	192	384
b.Statistic Load Regulation [mV](maximum)	18	45	108	135	216	432
c.Temperature Coefficient *4	0.03%/°C					
d.Drift[mV](maximum) *5	25	40	75	90	135	255
e.Dynamic Load Regulation [mV](typical) *6	60	150	360	450	720	1440
f.Recovery Time *6	0.5mS(typical)					
Rise up time	300mS(maximum) at 25°C and rated input/output					
Hold up time	20mS(minimum) at 25°C and rated input/output					
<b>Functions</b>						
Overcurrent Protection	Current Limiting with automatic recovery					
Overvoltage Protection	output shutdown					
Overheat Protection	output shutdown					
Remote Sense	available					
Remote On/Off	available					
<b>Environmental</b>						
Operating Temperature	0 to +50°C					
Operating Humidity	85%RH(non-condensing)					
Storage Temperature	-20 to +85°C					
Storage Humidity	30 to 85%RH(non-condensing)					
Withstanding Voltage	Primary-Secondary AC2,500Vfor 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC500V for 1minute					
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester					
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s <sup>2</sup> ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)					
Shock	294m/s <sup>2</sup>					
Cooling	Foced Air(fan installed)					
? Leakage Current	1.0mA(maximum)					
? Line Conduction Noise	Not specified					
? Safety	-					
? Weight (typical)	2,000g					
? MTBF [H]	310,000					
? Switching Frequency[kHz](typical)	63					

Conditions:

\*1 at cold start

\*2 at DC260V and rated output

\*3 measured by a bayonet probe at the output connector at a 0 to 100MHz bandwidth

\*4 at 0 to +50°C

\*5 for 7hour period after 1hour warm-up at 25°C and rated input/output

\*6 when output current changed from 25% to 75% of rated output current rapidly at rated input



# ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com

**Dimension Diagram(mm)**

