

150 WATT AC-DC CONVERTER

WRE-SX Series

General Description

Universal or auto-ranging inputs for world wide use. Output power from 15 to 600 watts. Up to 4 outputs available. Approved to international safety standards.

**Dimensions: 33.5Wx98.5Lx97H
(400g)**




Features


1. Universal input 85-264VAC
2. EMI: meets EN 55022/B, FCC/B
3. Compact size
4. High efficiency and reliability
5. Output voltage adjustable
6. Over voltage protection

Options

N/A

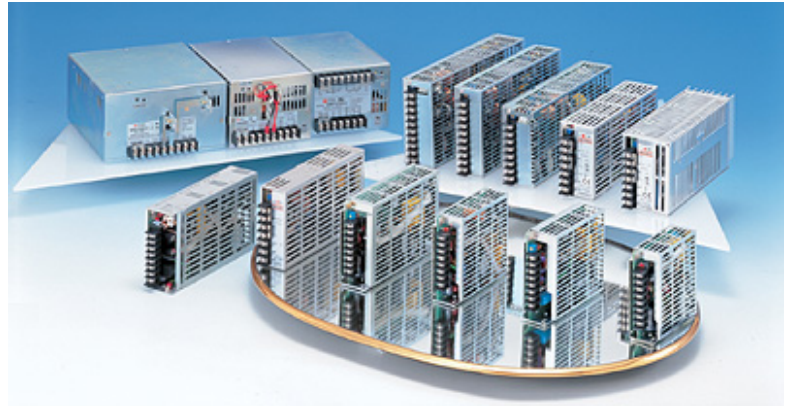

Specifications<AC/DC> WRE**SX-U 150WATTS/SINGLE	Model				
	WRE05SX-U	WRE12SX-U	WRE15SX-U	WRE24SX-U	WRE48SX-U
Input Characteristic					
Input Voltage	AC115/230V				
Input Current	3.3A at AC115V/1.9A at AC230V				
Input Range *1	AC85-132V/AC170-264V(DC220-350V)				
Input Frequency	50/60Hz				
Input Frequency Range	47-440Hz				
Phase	Single				
Inrush Current *2	12A(maximum)at AC115V/24A(maximum) at AC230V				
Efficiency [%] (typical) *3	82	84	85	87	87

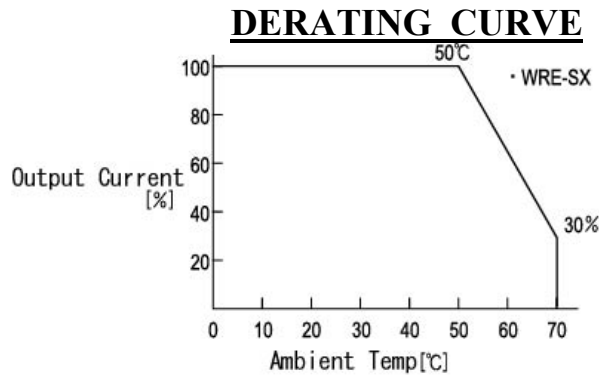

※For safety specification, contact ETA Sales Representative


Output Characteristic	Model					
WRE**SX-U(150WATTS/SINGLE)	WRE05SX-U	WRE12SX-U	WRE15SX-U	WRE24SX-U	WRE48SX-U	
Output Voltage [V]	5	12	15	24	48	
Output Current [A]	30.0	14.0	11.0	7.0	3.5	
Voltage Adjust Range	+/- 10% of Rated Output Voltage(at no load within the input range)					
Ripple and Noise [mVp-p](maximum) *4	100	170	200	290	530	
Regulation						
a.Statistic Line Regulation [mV](maximum)	15	36	45	72	144	
b.Statistic Load Regulation [mV](maximum)	15	36	45	72	144	
c.Temperature Coefficient *5	0.01%/°C					
d.Drift[mV](maximum) *6	40	75	90	135	255	
e.Dynamic Load Regulation [mV](typical) *7	not specified					
f.Recovery Time *7	not specified					
Rise up time	500mS(maximum)AC115V/200mS(maximum)AC230V at 25°C and rated input/output					
Hold up time	20mS(minimum) at 25°C and rated input/output					
Functions						
Overcurrent Protection of Rated Output Current[A]	≥110%	Current Limiting with automatic recovery				
		33.0	15.4	12.1	7.7	3.85
Overvoltage Protection of Rated Output Voltage[V]	≥110% of	Output shutdown (to reset, leave 1 minute after shut-off)				
		5.5	13.2	16.5	26.4	52.8
Remote Sense	available					
Remote On/Off	not available					

Power Fail Detection	not available
Parallel/series Operation	not available
Environmental	
Operating Temperature *8	0 to +50°C
Operating Humidity	30 to 85%RH(non-condensing)
Storage Temperature	-20 to +85°C
Storage Humidity	10 to 85%RH(non-condensing)
Withstanding Voltage	Primary-Secondary AC3,000V for 1minute
	Primary-Frame Ground AC2,500V for 1minute
	Secondary-Frame Ground AC500V for 1minute
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester
Vibration	5-10Hz: 10mm double amplitude, 10-55Hz: 19.6m/s ² , 20minutes' period for 60minutes each along X, Y, Z axes(non-operating)
Shock	294m/s ²
Cooling	Convection
Leakage Current	1mA(maximum) at 25°C, rated input/output and rated input frequency
Line Conducted Noise	Built to meet VDE0871 Class B(150kHz)
	Built to meet FCC Part15-B Class B
Safety	UL: UL1950
	CUL: CSA C22.2 No234(Level 3)
	VDE: EN60950, IEC950, VDE0805
□ Weight (typical)	1,120g
□ MTBF [H]	430,000
□ Switching Frequency[kHz](typical)	140

Condition:



- *1 Auto-changeable between 100V input and 200V input at AC140V +/-2V
- *2 at cold start
- *3 at DC260V input and rated output
- *4 measured by a bayonet probe at output connector at a 0 to 100MHz bandwidth
- *5 at 0 to +50°C
- *6 for 7hour period after 1hour warm-up at 25°C and rated input/output
- *7 when output current changed from 25% to 75% of rated output current rapidly at AC115/230V input
- *8 safety approved at 25°C

DIMENSION DIAGRAM



Pin Assignments

- 1 +S
- 2 +V out
- 3 OV out
- 4 -S
- 5 FG
- 6 AC/DC in (N)
- 7 AC/DC in (L)

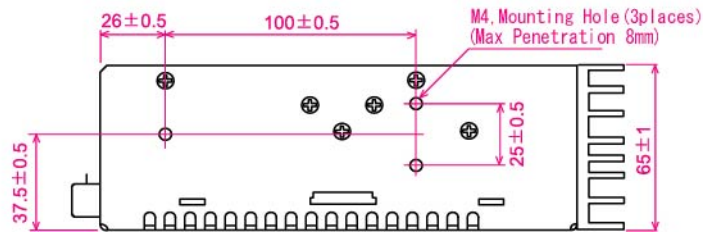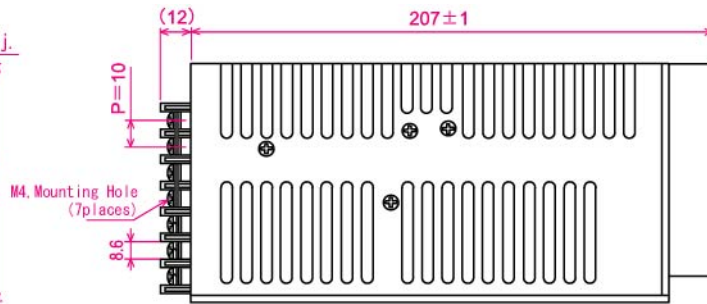

EFFICIENCY CURVE

